

Turbo 100

Inline mixed flow fans




- Maximum airflow: 245
- Sound pressure level LpA at 3 m: 32
- Motor type: AC
- Control: Speed switch
- Impeller type: Mixed
- Casing material: Plastic
- Installation in any position
- Cable with mains plug


	Unit of measurement	Turbo 100	
Connected air duct size	mm	100	
Speed	-	2	
Phases	-	1	
Minimum supply voltage	V	230	
Maximum supply voltage	V	230	
Power supply frequency	Hz	50/60	
Rated power	W	23	25
Unit current	A	0.10	0.11
Maximum airflow	m ³ /h	180	245
rotation speed at 50hz	-		
Sound pressure level LpA at 3 m	dB(A)	27	32
Weight	kg	1.75	
Transported air temperature (max)	°C	60	
Ambient air temperature min	°C	0	
Ambient air temperature max	°C	0	
Ingress protection rating	-	IPX4	
Ingress protection rating of the drive	-	IPX4	

Dimensions

ØD	ØD1	B	H	L
96	164	167	190	246

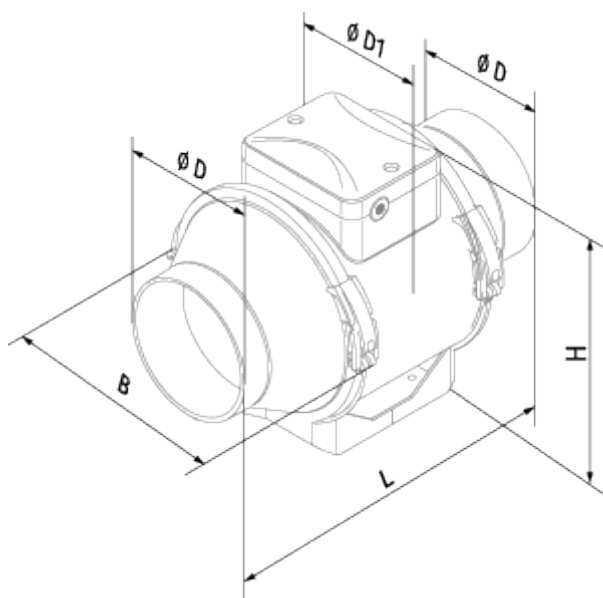

Ecodesign

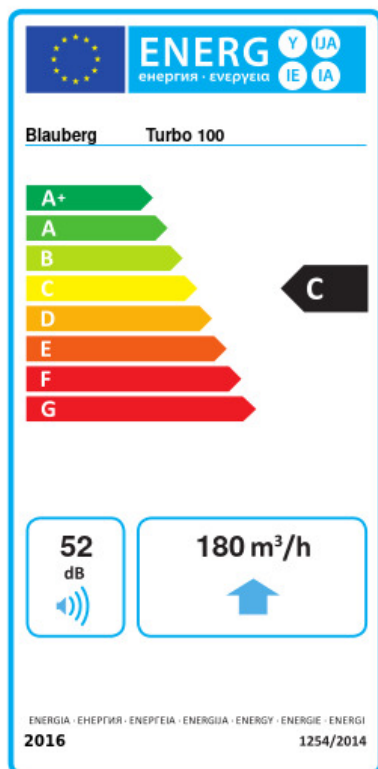

Trademark	Blaiberg					
Model	Turbo 100					
Specific energy consumption (SEC) (kWh/(m²/a))	Cold		Average		Warm	
	52.9	A+	25.9	C	10.4	E
Type of ventilation unit	Unidirectional					
Type of drive installed	Variable speed					
Type of heat recovery system	None					
Maximum flow rate (m³/h)	180					
Electric power input (W)	25					
Reference flow rate (m³/s)	0.035					
Reference pressure difference (Pa)	50					
Specific power input (SPI) (W/(m³/h))	0.183					
Control typology	Local demand control					
Maximum external leakage rates (%)	2.7					
Sound power level (dB(A))	52					
Declared typology	RVU UVU					
The annual electricity consumption (AEC) (kWh/a)	Cold	Average		Warm		
	97	97		97		
The annual heating saved (AHS) (kWh/a)	Cold	Average		Warm		
	5536	2830		1280		